

VirTis Ultra 50L Pilot Lyophilizer



(Cleanroom configuration 50L Ultra EL shown)

Key Features

- Compact design for easy installation.
- Single product chamber design allows for larger batches and product uniformity.
- Available with a Wizard 2.0 or LyoS™ control system.
- Optional hydraulic stoppering system available.
- Narrow Footprint (cleanroom configuration available).

Standard Electrical Requirements

Voltage [¶]	208 / 230 VAC	208 / 230 VAC	400 VAC
Hertz [¶]	60 Hz	50 Hz, 60 Hz	50 Hz
Phase [¶]	1 Φ	3 Φ	3 Φ
Breaker Amperage [¶]	50 A	40 A	30 A
Recommended Outlet	NEMA 6-50R	NEMA L15-50R	N/A

Note: Other electrical configurations available.

Performance Specifications

	EL
Lowest Shelf Temperature (50 Hz / 60 Hz)	$\leq -67^{\circ}\text{C} / -70^{\circ}\text{C}$
Shelf Temperature Control Range*	-55 to 65 °C
Shelf Pull-Down from 20 °C to -40 °C†	≤ 60 minutes
Lowest Condenser Temperature (50 Hz / 60 Hz)	$\leq -82^{\circ}\text{C} / -85^{\circ}\text{C}$
Maximum Condenser Capacity	≥ 50 L
Condenser Surface Area	10 ft ² (.93 m ²)
Condenser Pull-Down from 20 °C to -45 °C	≤ 35 minutes
Maximum Ice Condensing Capacity in 24 hours‡	≥ 20 L
Maximum Deposition Rate‡	≥ 0.83 L/hour
Number of Compressors	2
Compressor Horsepower	3.5 hp, 1.5 hp
System Refrigerant	R508B, R407C
Vacuum Time to 100 Millitorr§	≤ 45 minutes
Vacuum Rate of Rise§	≤ 30 mT/hour
Volume-Based Leak Rate§	$\leq .0042$ mbar-L/sec
Lowest System Vacuum§	≤ 15 mT
Temperature Uniformity¶	$\pm 1.0^{\circ}\text{C}$


Note: Performance specifications are based on SP Scientific test data from units operating at an ambient room temperature of approximately 20 °C. SP Scientific recommends an operating range of 15-25 °C (59-77 °F) and a Relative Humidity of $\leq 80\%$ at sea level.

Utility Requirements

	Air-Cooled	Water-Cooled
Compressed Air (for units with isolation valve)	80 psig (5.5 bar)	80 psig (5.5 bar)
Ambient Room Temperature	15-25 °C (59-77 °F)	15-25 °C (59-77 °F)
Approx. Peak Room Heat Generated	22,900 BTU/h	5,400 BTU/h
Cooling Water Usage**	N/A	2-5 gpm (8-19 Lpm)
Cooling Water Load	N/A	17,500 BTU/h

VirTis Ultra 50L

Pilot Lyophilizer

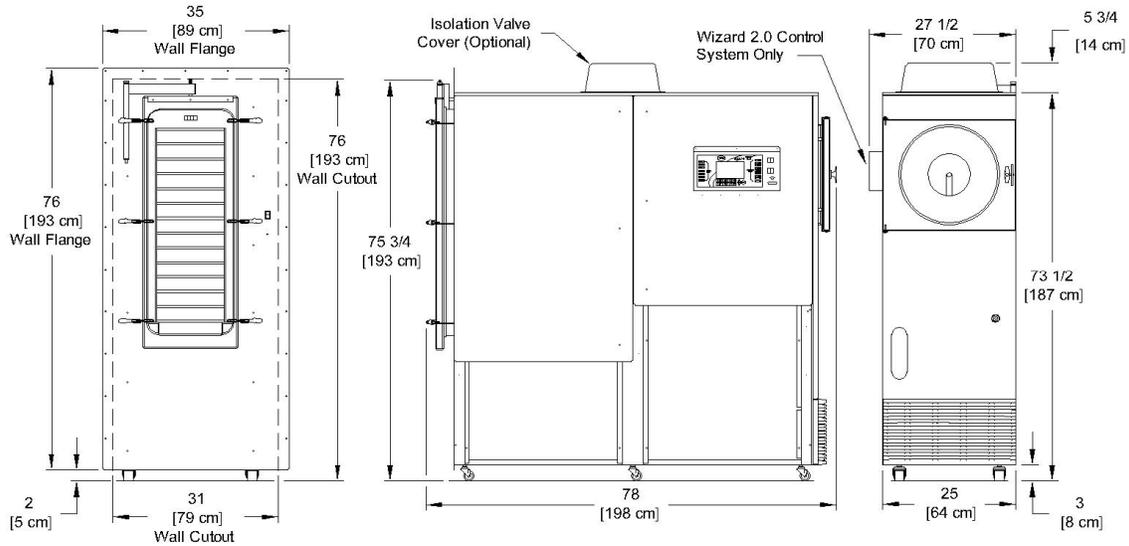

Dimensional Data

	Narrow Configuration	Cleanroom Configuration
Width	25 in (64 cm)	25 in (64 cm)
Depth	78 in (198 cm)	78 in (198 cm)
Height	75.75 in (193 cm)	75.75 in (193 cm)
Maximum Weight	2000 lb (909 kg)	2000 lb (909 kg)
Minimum Clearance	10 in (25.4 cm)	10 in (25.4 cm)

Note: SP Scientific recommends a 24-inch (61 cm) clearance around all sides of the unit for serviceability. When placed side by side, increase clearance to 48 inches (122 cm).

Shelf Configuration

	Narrow Configuration	Cleanroom Configuration	Shelf Area	Shelf Clearance
			Bulk Drying or Stoppering	Bulk or Stoppering
			4 Shelves	8.44 in (214 mm)
			5 Shelves	6.68 in (169 mm)
			6 Shelves	5.51 in (139 mm)
			7 Shelves	4.67 in (118 mm)
			8 Shelves	4.04 in (102 mm)
			9 Shelves	3.55 in (89 mm)
			10 Shelves	3.15 in (79 mm)
			11 Shelves	2.83 in (71 mm)
			12 Shelves	2.56 in (64 mm)
			13 Shelves	2.34 in (59 mm)
			14 Shelves	2.14 in (54 mm)
			15 Shelves	1.97 in (50 mm)
Vapor Port	Eight (8) inches		Shelf Size (W x D): 10.8 x 20.5 in (274.3 x 520.7 mm)	

Additional Information

Construction	316L Stainless Steel Shelves, Product Chamber and Condenser Chamber
Stoppering	Bottom-Up Hydraulic
Defrost Type	Hot Gas
Refrigerant Type	CFC-Free
Vapor Port	Eight (8) inches

* Shelf fluid temperature controlled to within $\pm 0.5^\circ\text{C}$ of the setpoint within the Shelf Temperature Control Range (PLC-based controllers only). Lyophilizers equipped with Wizard 2.0 microprocessor-based controllers shall be capable of controlling at shelf temperatures within $\pm 1.0^\circ\text{C}$ of the setpoint within the Shelf Temperature Control Range when at 100 mTorr.

[†] Shelf Pull-Down times are based on units with one (1) to eight (8) shelves. The increased mass of stainless steel and additional heat transfer fluid required for nine (9) or more shelves increases pull-down time. Use the following multipliers when determining the pull-down time specification for the following shelf configurations:

9-shelf units, standard pull-down time x 1.13	12-shelf units, standard pull-down time x 1.5	15-shelf units, standard pull-down time x 1.88
10-shelf units, standard pull-down time x 1.25	13-shelf units, standard pull-down time x 1.63	
11-shelf units, standard pull-down time x 1.38	14-shelf units, standard pull-down time x 1.75	

[‡] The specified Maximum Ice Condensing Capacity in 24 Hours and Maximum Deposition Rate are based on the process of freeze-drying water as aggressively as possible. The freeze dryer's ability to collect ice at an hourly rate or over a specified period will always be application dependent.

[§] Vacuum specifications are based on SP Scientific test data from similar units equipped with a Leybold D16B two-stage rotary vane vacuum pump. Units equipped with other vacuum pumps may yield different results.

[¶] Shelf temperature deviations shall not exceed the specification relative to the mean of the highest and lowest temperature readings.

^{||} VirTis units are highly customizable and SP Scientific can configure any unit to conform to the service requirements of a wide range of international voltage and phase configurations. Contact SP Scientific for more information.

[~] Cooling water temperatures should not exceed 24°C .